

Pedestrian Areas
Walkways
Building Entrances
Parking Lots
Shopping Malls



RD - round shade and cap



GPT - glow top pointed shade and cap



PT - pointed shade and cap



FL - flat shade and cap

Specifications



Certifications The fixture shall be ETL and CETL listed for wet location. Meets IP65 standard.

Housing The housing shall be constructed of spun and cast aluminum.

Ballast The ballast shall be readily accessible, removable and insulated.
 The fixture is to be pre-wired and electronically tested before shipment.

Lens The lens shall be clear polycarbonate (CLL, CLR, CLB & IND versions) or opal polycarbonate for wide angle light distribution (O version) or clear, partially frosted polycarbonate. (ECLR version)

Glow Top The glow tops shall be constructed of uv resistant opal or clear polycarbonate standard or colored polycarbonate optional.

Reflectors The reflectors shall be aluminum and silver anodized.

Hardware All exposed hardware shall be stainless steel.


Mounting Details The fixture shall either externally slipfit a 2-3/8" tenon (PM3) or internally slipfit a 4" pole. (PM4)

Finish BK-BZ-WH-GY-GR-NA are thermoset polyester powder coat. Custom color available upon request.

AA

PROJECT
FIXTURE TYPE
CATALOG#

AA-105 AA-205

 Some luminaires use fluorescent or high intensity discharge (HID) lamps that contain small amounts of mercury. Such lamps are labeled "Contains Mercury" and/or with the symbol "Hg." Lamps that contain mercury must be disposed of in accordance with local requirements. Information regarding lamp recycling and disposal can be found at www.lamprecycle.org

Product Order Guide

Series	Max Watts	Lamp Type	Voltage ¹	Optics	Finish ¹	Shade	Options
AA-105/	26 CFT	CFT ³	120	O	Opal Polycarbonate Lens	BK Black	FL Flat PM3 ⁴ 3" Pole adaptor
AA-205	32 CFT	CFT ³	208	CLR	Clear Polycarbonate Lens	BZ Bronze	PT Pointed PM4 ⁵ 4" Pole adaptor
	42 CFT	CFT ³	240		with Variform Reflector	WH White	RD Round
	70 MH	T6	277	CLB	Clear Polycarbonate Lens	GR Green	GFL Glow Flat Opal
	150 MH ⁹	T6			with Baffle and Variform Reflector	NA Natl Alum ⁸	GPT Glow Pointed Opal
	70 MH ⁹	E17 ²				GY Gray	GRD Glow Round Opal
	100 MH ⁹	E17 ²		CLL	Clear Polycarbonate Lens	CC Custom Color	CFLC Glow Flat Clear
	150 MH ⁹	E17 ²			with Controform Reflector		GPTC Glow Pointed Clear
	50 HPS	E17 ²		ECLR ¹⁰	Partially Frosted Lens with Exterior Controform Reflector		GRDC Glow Round Clear
	70 HPS	E17 ²					
	100 HPS	E17 ²		GR3	Glass Refractor Type 3		HSS House Side Shield
	150 HPS	E17 ²		GR5	Glass Refractor Type 5		BM2180 ⁶ Pole adaptor
				IND ^{9,7}	Clear Polycarbonate Lens with Indirect optics		TUB2180 ⁶ 2 @180°
							BM3120 ⁶ Pole adaptor
							TUB3120 ⁶ 3 @120°
							BM490 ⁶ Pole adaptor
							TUB490 ⁶ 4 @90°
							WM Wall Mount
							TUBWWM Tubular Wall Mount
							EM ¹¹ Emergency Battery Backup


1. Consult factory for other colors and voltages
2. Lamps 150 W and below are medium base.
3. CFT = triple bias
4. PM3 - externally slip fits 2-3/8" tenon
5. PM4 - internally slip fits 4" pole

6. BM/TUB - externally slip fits specified tenon.
7. IND - Indirect lightsource is a spot reflector with 70W E17/T6, 100W E17, or 150W T6 lamp, AA-105 only.
8. NA - Natural Aluminum
9. Requires internal ballast box extension
10. Note ECLR option 70HPS/MH max.
11. EM requires PM3 or PM4 ballast enclosure.


Example: AA-105-100MH-E17-277-CLL-BK-FL-PM3

Luminaire Dimensions


Luminaire	A		B		C		D		E		Weight		EPA
	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	lbs.	kg	
AA-105-GR5-PT	23.62	600	20.63	524	3.00	76	n/a	n/a	n/a	n/a	18.5	8.4	1.4
AA-205-GR5-PT	15.00	381	19.00	487	3.00	76	n/a	n/a	n/a	n/a	18.2	8.3	1.3
AA-105-CLR-150W-RD	23.62	600	25.60	650	3.50	89	n/a	n/a	n/a	n/a	20.0	9.1	1.7
AA-205-CLR-150W-RD	15.00	381	24.60	625	3.50	89	n/a	n/a	n/a	n/a	19.7	8.9	1.5
AA-105-CLB-WM-FL	23.62	600	27.68	665	n/a	n/a	11.00	279	25.20	640	23.1	10.5	1.8
AA-205-CLB-WMTUB-FL	15.00	381	26.38	670	n/a	n/a	11.00	279	24.38	619	22.9	10.4	1.7
AA-105-BM2180	36.00	915	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	46.2	21.0	3.7
AA-205-TUB2180	36.00	915	n/a	n/a	n/a	n/a	n/a	n/a	n/a	n/a	45.8	20.8	3.4




AA-105-GR5-PT




AA-105-CLR-150W-RD




AA-105-CLB-WM-FL

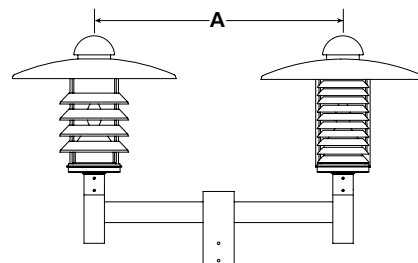


AA-105-BM2180




AA-205-GR5-PT



AA-205-CLR-150W-RD



AA-205-CLB-TUBWWM-FL

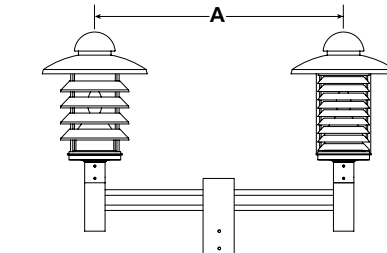

AA-205-TUB2180