


Pedestrian Areas

Walkways

Parks

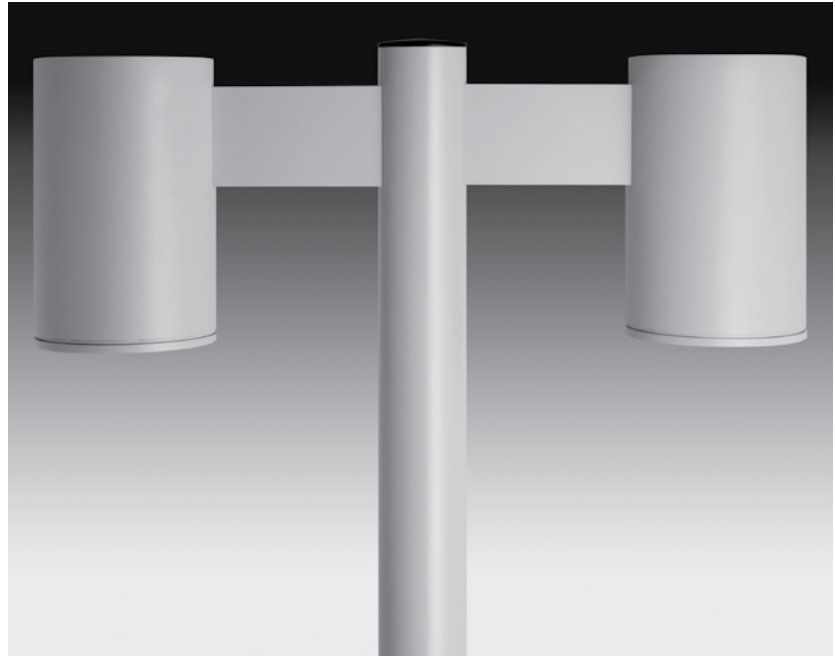

Specifications



Certifications

ETL and CETL listed for wet location and meets IP65 standard, dust-tight and water-jet proof.

Lamp/Ballast Housing

The housing is constructed of extruded aluminum and heavy wall aluminum castings.

Lens

The lens shall be clear tempered safety glass, sealed to the housing with high temperature silicone.

Lens Frame

Heavy duty cast aluminum lens frame is supplied as standard. Fastened to housing with four 1/4-20 stainless steel Allen cap screws.

Reflectors

Spun aluminum highly specular Alzak™ finish for either NEMA type 2 spot (SPT) or NEMA type 3 flood (FLD) distributions. Fluorescent flood reflector for up to 42W CFT lamps.

Lamp Holder

Porcelain 4kv pulse rated medium base for HID and Incandescent lamp sources.

Mounting Details

The mounting arm is attached to the pole with two 3/8" all thread rods and accompanying nuts and washers.

See Installation Sheet For More Details

Finish

BK-BZ-WH-GR-GY-NA are thermoset polyester powder coat. Custom color available upon request.

PROJECT
FIXTURE TYPE
CATALOG#

 Some luminaires use fluorescent or high intensity discharge (HID) lamps that contain small amounts of mercury. Such lamps are labeled "Contains Mercury" and/or with the symbol "Hg." Lamps that contain mercury must be disposed of in accordance with local requirements. Information regarding lamp recycling and disposal can be found at www.lamprecycle.org

Product Order Guide

Series	Max Watts	Lamp Type	Voltage ¹	Optics	Finish ²	Options
AA-127	Fluorescent					
	18CFQ	CFQ	120	SPT ⁵ Spot	BK Black	D ⁴ Downlight
	42CFT	CFT	208	FLD ⁵ Flood	BZ Bronze	PM2180 Pole Mount 2@180
			240	FL Fluorescent	WH White	PM290 Pole Mount 2@90
			277		GR Green	PM3120 Pole Mount 3@120
	Metal Halide					
	70MH	E17			NA Natural Aluminum	PM490 Pole Mount 4@90
	70MH	Par30 ³			GY Gray	
	70MH	Par38 ³			CC Custom Color	
	70MH	T6				
	High Pressure Sodium					
	70HPS	E17				
	Incandescent					
	100INC	Par38 ³	120			
	LED					
Titan25WW	CUS3 ⁶	120-277	Beam 25° Warm White (3050K)			
Titan25CW	CUS3 ⁶	120-277	Beam 25° Cool (Daylight) White (4700K)			
Titan25FIX	CUS3 ⁶	120-277	Beam 25° Fixed Color Red, Green, Blue, Amber			
Titan 25TC	CUS3 ⁶	120-277	TruColor Warm White (3050°K) 1290 Raw Lumens			

¹ Consult factory for other voltages.

² Thermoset polyester powder coat standard. Consult factory for other finishes.

³ Does not require internal optics.

⁴ Specify D-optics and/or U-optics.

⁵ Spot Nema 2 (T6 & E17), Flood Nema 3 (T6 & E17)

⁶ The CUS3 is a 25W Titan LED from Lamina

Note: E-17 Lamps 150W and below are medium base
CF=single biax, CFQ = double biax, CFT = triple biax

Example: AA-127-42CFT-120-FL-BK-D-PM2180

Luminaire Dimensions

Luminaire	A		B		C		Weight	
	Inch	mm	Inch	mm	Inch	mm	lbs.	kg
AA-127-D	8.00	203	12.75	324	13.50	343	11.50	5.20
AA-127-D-PM2180	8.00	203	12.75	324	27.00	686	23.00	10.40

