


Phone: 714 668 3660
 Fax: 714 668 1107
 Email: sales@allscape.net
 http://www.allighting.com


INSTALLATION SHEET

Safety, Warnings and Suggestions


- ¹ **Care** should be taken not to position fixtures in locations where bare skin can come into contact with the potentially high temperatures on the lens.
- ² **Make** sure that electrical power is disconnected before any work is performed.
- ³ **All** gaskets and sealing surfaces must be kept clean during installation.
- ⁴ **All** wiring and installation should meet local, state and national electrical codes.
- ⁵ **Install** correct lamp type and wattage.




BL-44




BL-45



BL-47



BL-48




BL-49


P#32A39893

© 2005 - 2009 ALLSCAPE. All rights reserved.
 ALLSCAPE is a registered trademark of Philips.


Due to a program of continuous improvement, ALLSCAPE reserves the right to make any variation in design or construction to the equipment described.

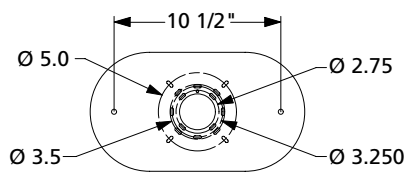

BL-44 THRU 49
MOUNTING DETAIL

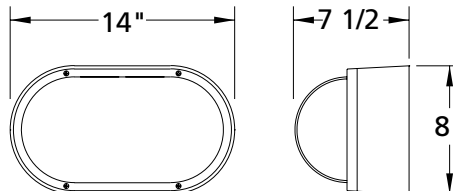

BL-44 THRU 49
TYPICAL FIXTURE DIMENSIONS

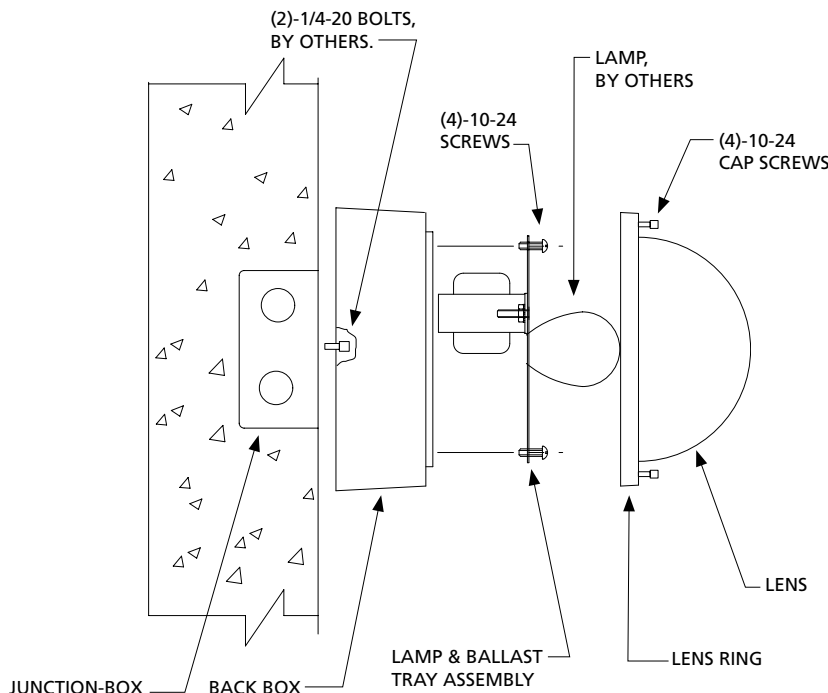

TYPICAL WALL INSTALLATION

1. Remove the fixture from the box. Remove the lens and lens ring by loosening (4)-10-24 cap screws. Remove the ballast tray assembly by loosening (4)-10-24 screws.
2. Secure the back box to the wall with (2)-1/4-20 bolts or to the junction box with 8-32 screws, hardware by others. Make power and ground connection using UL approved connectors at the Junction-box (J-box by others), Reinstall the ballast tray with the (2)-10-24 screws provided.
3. (LAMP INSTALLATION)
 Install the correct lamp type and wattage. Reinstall the lens and lens ring. Tighten the (4)-10-24 cap screws.