




**Building Mount**  
**14" Square**  
**Corridor**  
**Walkways**  
**Accent**  
**Building Entrances**

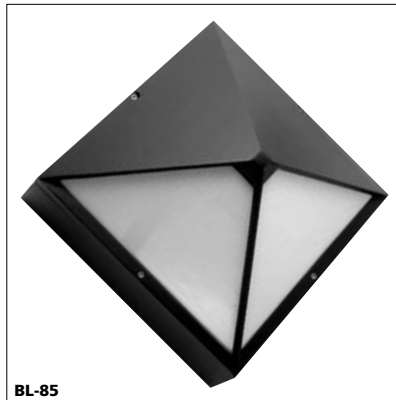

BL-85

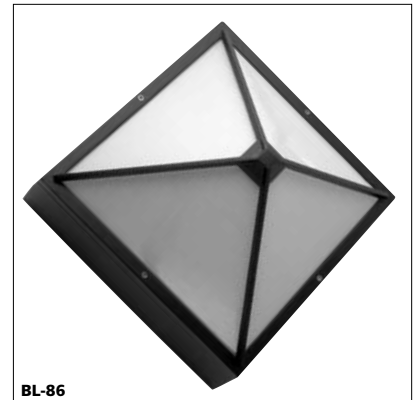

BL-86

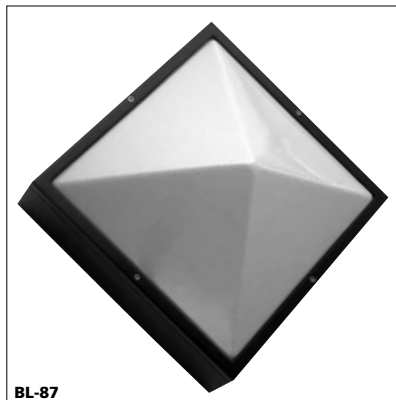

BL-87



BL-89

### Specifications



**Certifications** The fixture shall be ETL and CETL listed for wet location. Also meets IP65 standard

**Ballast Housing** Cast aluminum with a minimum thickness of 1/8". Mounting plate welded to ballast housing for J-box mounting. Conduit mounting available, consult factory. Housing is fully gasketed with 3/16" extruded EDPM cord gasket.

**Lens Frame** Cast aluminum mounted to ballast housing with 10-24 stainless steel Allen cap screws.

**Lens** Opal UV-stabilized polycarbonate (OP) is standard on the BL-85/86/87. Lens supplied with one-piece extruded silicone gasket. The BL-89 lens shall be tempered flat and textured P62 glass with silicone gasket.

**Ballast** Fluorescent ballasts for 42CFT and 2-D lamps are electronic (minus 20° C). Other fluorescent 13- through 26-watt quad tube is core & coil (0° C).

**Finish** BK-BZ-WH-GR-GY-NA thermoset polyester powder coat which is electrostatically applied and bonded by heat fusion thermosetting. CC available upon request.

BL

<b>PROJECT</b>
<b>FIXTURE TYPE</b>
<b>CATALOG#</b>



Some luminaires use fluorescent or high intensity discharge (HID) lamps that contain small amounts of mercury. Such lamps are labeled "Contains Mercury" and/or with the symbol "Hg." Lamps that contain mercury must be disposed of in accordance with local requirements. Information regarding lamp recycling and disposal can be found at [www.lamprecycle.org](http://www.lamprecycle.org)

## Product Order Guide

Series	Max Watts	Lamp Type	Voltage <sup>1</sup>	Finish <sup>1</sup>	Options
BL-85/86/87/89	(2) 26 CFQ	CFQ <sup>2</sup>	120	BK Black	EMG Emergency Battery Backup
	42 CFT	CFT <sup>2</sup>	208	BZ Bronze	
	38 Watt 2-D	F382D	240	WH White	
	70 MH	E17	277	GR Green	
	70 HPS	E17		NA Natural Aluminum	
				GY Gray	
				CC Custom Color	

<sup>1</sup> Consult factory for other colors and voltages

<sup>2</sup> CF = single biax, CFQ = double biax, CFT = triple biax

## Luminaire Dimensions

Luminaire	A		B		C		Weight	
	Inch	mm	Inch	mm	Inch	mm	lbs.	kg
BL-85	20.00	508	8.50	216	14.00	356	17	7.7
BL-86	20.00	508	8.50	216	14.00	356	15	6.8
BL-87	20.00	508	8.00	203	14.00	356	15	6.8
BL-89	20.00	508	8.62	219	14.00	356	17	7.7

