

<b>PROJECT</b>
<b>FIXTURE TYPE</b>
<b>CATALOG#</b>

© 2005 - 2009 ALLSCAPE. All rights reserved.  
 ALLSCAPE is a registered trademark of Philips.  
 Due to a program of continuous improvement, ALLSCAPE reserves the right to make any variation in design or construction to the equipment described.

**Round Aluminum Straight Poles**

Catalog Number	Pole Dimensions	Bolt Circle	Anchor Bolt Size	Max. EPA <sup>1</sup>	
				80	100
RAS4DB2-10	4" O.D. x 10'	8"-13" dia.	(4) 3/4" x 19"	12.53	7.52
RAS4DB2-12	4" O.D. x 12'	8"-13" dia.	(4) 3/4" x 19"	10.08	5.84
RAS4DB2-14	4" O.D. x 14'	8"-13" dia.	(4) 3/4" x 19"	6.53	3.60
RAS4DB2-16	4" O.D. x 16'	8"-13" dia.	(4) 3/4" x 19"	5.21	2.64

**Tenon Options**

2-3/8" O.D.	T238
3" O.D.	T300



**Dimensions**

Base	16" dia. x 22" H
Base Cover (included)	Internal Anchor Rods
Hand-Hole Opening	9" x 10"
Shaft	4" Smooth Straight
Wall	0.125 Aluminum

**Finishes**

BK	Black	Polyurethane enamel finish. Assemblies are shot blasted to create a surface profile which allows for the highest level of paint adhesion, creating superior weatherability and fade resistance.
BZ	Bronze	
WH	White	
VR	Verde	
GR	Green	



**Example: RAS4DB2-12-BK**

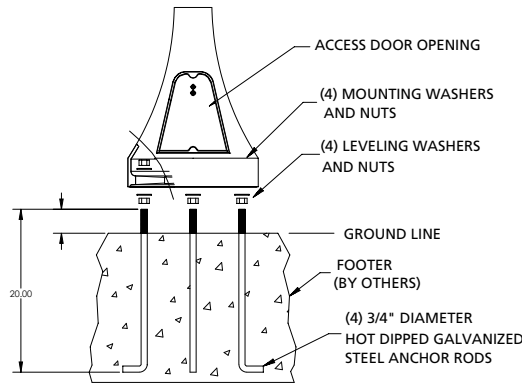


**When ordering:**

The diagram will help you properly designate the orientation of your fixtures.

The access door side (S) is generally located on the house side positioning of the pole, with street side being the opposite (N). Therefore, if you plan to mount one fixture on the roadway side of a pole, you should use mounting code "N".



<sup>1</sup> EPA values based on destructive break testing. For AASHTO ratings, contact factory.

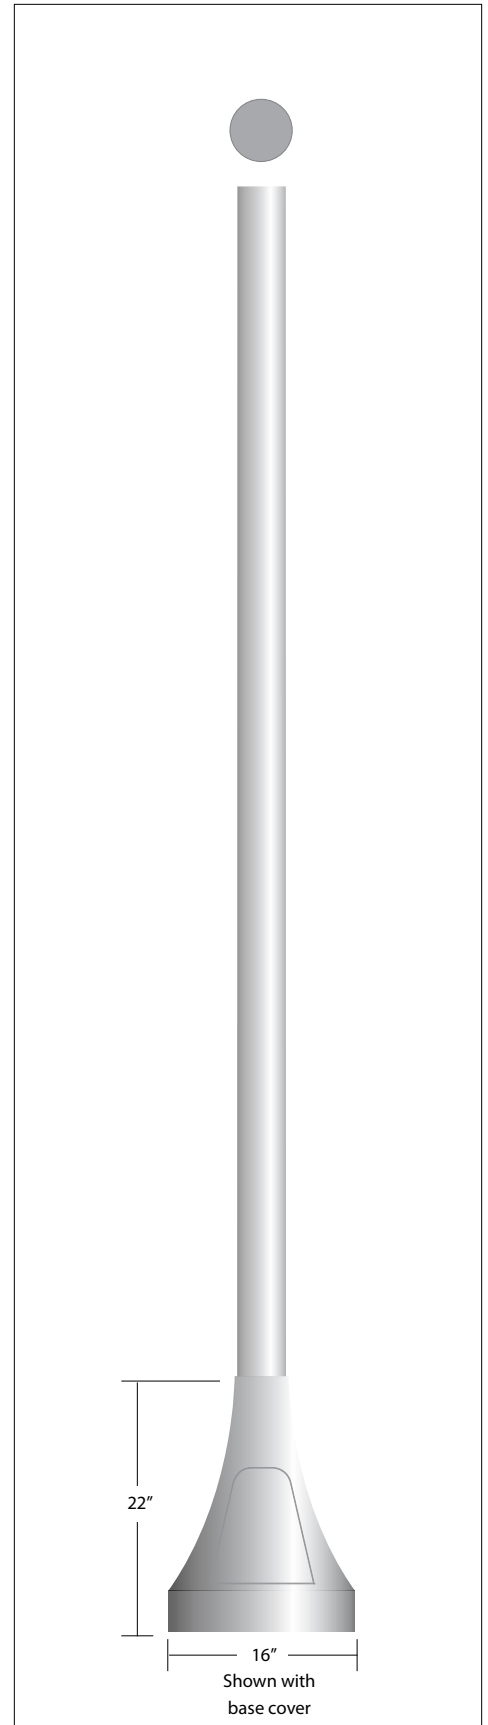

P&B