

| |
|--------------|
| PROJECT |
| FIXTURE TYPE |
| CATALOG# |

©2004-2011 Koninklijke Philips Electronics N.V. All rights reserved.
 ALLSCAPE is a registered trademark of Philips.
 Due to a program of continuous improvement, ALLSCAPE reserves the right to make any variation in design or construction to the equipment described.

Round Aluminum Tapered Poles

| Catalog Number | Pole Dimensions | Bolt Circle | Anchor Bolt Size | Max. EPA ¹ | |
|----------------|------------------|-------------|------------------|-----------------------|------|
| | | | | 80 | 100 |
| RAT43DB1-8 | 4"-3" O.D. x 8' | 6 1/2" | (4) 1/2" x 15" | 9.27 | 5.56 |
| RAT43DB1-10 | 4"-3" O.D. x 10' | 6 1/2" | (4) 1/2" x 15" | 7.18 | 5.11 |
| RAT43DB1-12 | 4"-3" O.D. x 12' | 6 1/2" | (4) 1/2" x 15" | 5.61 | 3.01 |

Tenon Options

| | | | | |
|--------|--------------------------|-------|-------------------------|--|
| T238 | 2-3/8" O.D. | | | |
| DM10 | Drill for single | DM390 | Drill for triple at 90° | |
| DM2180 | Drill for double at 180° | DM490 | Drill for quad at 90° | |
| DM290 | Drill for double at 90° | GFI | Provision only | |


Dimensions

| | |
|-----------------------|------------------------|
| Base | 9 1/8" dia. x 1 1/8" H |
| Base Cover (included) | 10" dia. x 6" H |
| Hand-Hole Opening | 2" x 4" |
| Shaft | 4" to 3" Tapered |
| Wall | 0.125 Aluminum |

Finishes

| | | |
|----|--------|---|
| BK | Black | Polyurethane enamel finish. Assemblies are shot blasted to create a surface profile which allows for the highest level of paint adhesion, creating superior weatherability and fade resistance. |
| BZ | Bronze | |
| WH | White | |
| VR | Verde | |
| GR | Green | |



Example: RAT43DB1-10-T238-BK

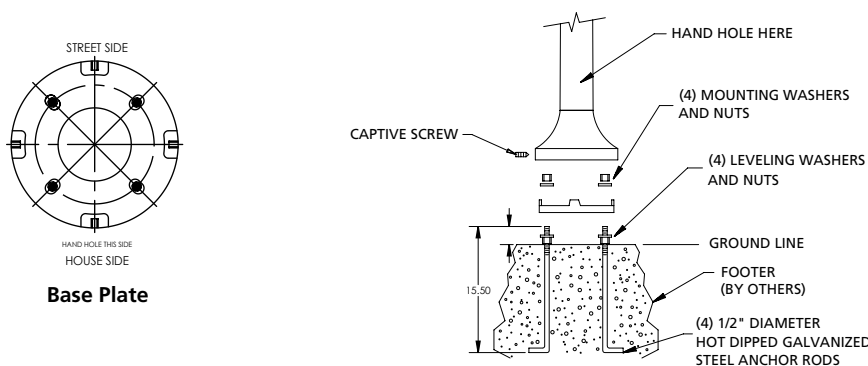

When ordering:

The diagram will help you properly designate the orientation of your fixtures.

The access door side (S) is generally located on the house side positioning of the pole, with street side being the opposite (N). Therefore, if you plan to mount one fixture on the roadway side of a pole, you should use mounting code "N".



¹ EPA values based on destructive break testing. For AASHTO ratings, contact factory.

