



SP

Corridor
Walkways
Accent
General Lighting

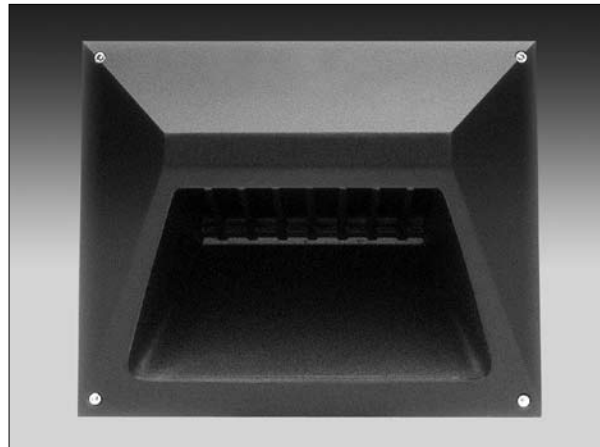

SP-30

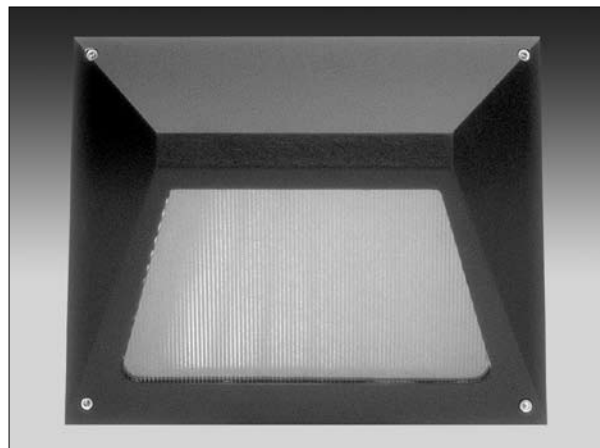

SP-31

Specifications



Certifications The fixture shall be ETL and CETL listed for wet location and concrete pour. Also listed for through wiring. The fixture shall meet ADA requirements.

Housing Cast aluminum with a minimum wall thickness of 3/16" and two 3/4" NPT conduit entrances for through-wiring capability.

Ballast HID ballasts are HPF core and coil. Fluorescent ballasts 26/32/42 watt CF are electronic, universal voltage 120-277V, 50 or 60 Hz. All ballasts are factory wired and tested, mounted to a removable tray with quick disconnects, HPF.

Lens / Optics SP-30 uses tempered clear glass sealed to face plate with high temperature silicone and clips. SP-31 uses a sandwich of tempered clear glass with a linear spread lens backing sealed to the faceplate with high temperature silicone and clips. The reflector is highly polished specular aluminum multifaceted for optimum efficiency.

The SP-31 can be inverted for uplight applications.

Trim Ring / Face Plate Cast aluminum standard. Secured to housing with four 1/4-20 stainless steel allen cap screws. Sealed with closed cell silicone gasket to prevent entrance of dust, insects and moisture.

Finish BK-BZ-WH-GR-GY-NA is thermoset polyester powdercoat which is electrostatically applied and bonded by heat fusion thermosetting. CC available upon request.

PROJECT
FIXTURE TYPE
CATALOG#



Some luminaires use fluorescent or high intensity discharge (HID) lamps that contain small amounts of mercury. Such lamps are labeled "Contains Mercury" and/or with the symbol "Hg." Lamps that contain mercury must be disposed of in accordance with local requirements. Information regarding lamp recycling and disposal can be found at www.lamprecycle.org

Product Order Guide

Series	Max Watts	Lamp Type	Voltage ¹	Finish ¹	Options
SP-30/31	150 MH	E17	120	BK Black	F Fusing
	150 HPS	E17	208	BZ Bronze	LT Left Throw Optics ³
	(2) 42 CF ²	CF	240	WH White	RT Right Throw Optics ³
	18 LPS	T17	277	GR Green	QS Quartz Standby
				GY Gray	EMG Emergency Battery Backup
				NA Natural Alum.	
				CC Custom	

¹ Consult factory for other colors and voltages


² Compact fluorescent lamp base options: (2)13W CF-GX23, (2)26W CF-GX24q-3, (2)42W CF-GX24q-4.

³ SP-31 only


Example: SP-31-100MH-E17-120-BK-RT

Photometric Data


SP-30-150MH
13,000 Initial Lumens
4.0 ft Mounting Height, 2.0 ft. grid
Value in footcandles

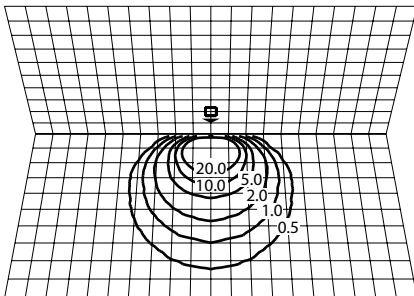

SP-31-150MH
13,000 Initial Lumens
4.0 ft Mounting Height, 2.0 ft. grid
Value in footcandles

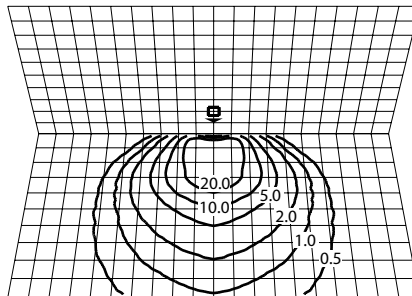

SP-31-150MH-RT
13,000 Initial Lumens
4.0 ft Mounting Height, 2.0 ft. grid
Value in footcandles

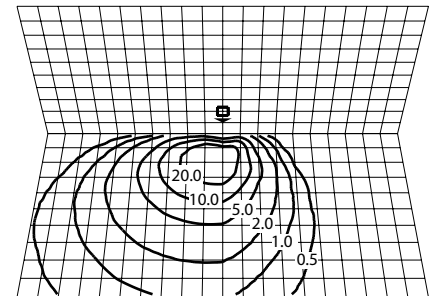

Luminaire Dimensions

Luminaire	A		B		C		D		E		F		G		Weight	
	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	lbs.	kg
SP-30/31	6.5	165	11.80	302	14.40	366	2.50	64	2.90	74	9.0	229	4.95	126	21	9.5

